


TUNG-SOL

TRIODE



METAL SHELL


COATED UNIPOTENTIAL CATHODE

HEATER


6.3 VOLTS 300 MA.

AC OR DC


ANY MOUNTING POSITION



GLASS BULB



BOTTOM VIEW
SMALL WAFER
6 PIN OCTAL



BOTTOM VIEW
SMALL WAFER
6 PIN OCTAL
METAL SLEEVE

THE 6J5 AND 6J5GT ARE GENERAL PURPOSE MEDIUM-MU TRIODES. THEY ARE USEFUL FOR SERVICE AS OSCILLATORS OR AUDIO-FREQUENCY AMPLIFIERS.

DIRECT INTERELECTRODE CAPACITANCES - APPROX.

| | 6J5 ^A | 6J5GT ^B | |
|-------------------------|------------------|--------------------|-----|
| GRID TO PLATE: (G TO P) | 3.4 | 3.8 | μmf |
| INPUT: G TO (H+K) | 3.4 | 4.2 | μmf |
| OUTPUT: P TO (H+K) | 3.6 | 5 | μmf |

^A WITH SHELL CONNECTED TO CATHODE.

^B WITH CLOSE-FITTING SHIELD CONNECTED TO CATHODE.

RATINGS

INTERPRETED ACCORDING TO RMA STANDARD MB-210

| | | |
|----------------------------------|-----|-------|
| HEATER VOLTAGE | 6.3 | VOLTS |
| MAXIMUM HEATER-CATHODE VOLTAGE | 90 | VOLTS |
| MAXIMUM PLATE VOLTAGE | 300 | VOLTS |
| MINIMUM NEGATIVE DC GRID VOLTAGE | 0 | VOLTS |
| MAXIMUM GRID CIRCUIT RESISTANCE | 1.0 | MEG. |
| MAXIMUM PLATE DISSIPATION | 2.5 | WATTS |
| MAXIMUM CATHODE CURRENT | 20 | MA. |

CONTINUED ON FOLLOWING PAGE

→ INDICATES A CHANGE OR ADDITION



CONTINUED FROM PRECEDING PAGE

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

CLASS A₁ AMPLIFIER

| | | | |
|----------------------|-------|-------|-------|
| HEATER VOLTAGE | 6.3 | 6.3 | VOLTS |
| HEATER CURRENT | 300 | 300 | MA. |
| PLATE VOLTAGE | 90 | 250 | VOLTS |
| GRID VOLTAGE | 0 | -8 | VOLTS |
| PLATE CURRENT | 10 | 9 | MA. |
| PLATE RESISTANCE | 6 700 | 7 700 | OHMS |
| TRANSCONDUCTANCE | 3 000 | 2 600 | μMHMS |
| AMPLIFICATION FACTOR | 20 | 20 | |

SIMILAR TYPE REFERENCE: Ratings and characteristics are identical to 7A4.


RESISTANCE COUPLED AMPLIFIER

| R ₁ MEG. | R _{g1} MEG. | R _g MEG. | E _{bb} = 90 VOLTS | | | E _{bb} = 180 VOLTS | | | E _{bb} = 300 VOLTS | | |
|------------------------|-------------------------|------------------------|----------------------------|------|----------------|-----------------------------|------|----------------|-----------------------------|------|----------------|
| | | | R _k | GAIN | E _o | R _k | GAIN | E _o | R _k | GAIN | E _o |
| 0.10 | A | 0.10 | 3300 | 14 | 13 | 2200 | 14 | 26 | 1800 | 14 | 40 |
| 0.10 | A | 0.24 | 3600 | 14 | 16 | 2700 | 15 | 33 | 2200 | 15 | 51 |
| 0.24 | A | 0.24 | 7500 | 14 | 16 | 5100 | 15 | 30 | 4300 | 15 | 44 |
| 0.24 | A | 0.51 | 9100 | 14 | 19 | 6800 | 15 | 39 | 5100 | 15 | 54 |
| 0.51 | A | 0.51 | 13000 | 14 | 16 | 9100 | 15 | 30 | 6800 | 16 | 40 |
| 0.51 | A | 1.0 | 15000 | 14 | 19 | 10000 | 16 | 32 | 7500 | 16 | 45 |
| 0.24 | 10 | 0.24 | --- | 15 | 13 | --- | 16 | 33 | --- | 17 | 46 |
| 0.24 | 10 | 0.51 | --- | 16 | 17 | --- | 17 | 38 | --- | 18 | 62 |
| 0.51 | 10 | 0.51 | --- | 16 | 14 | --- | 18 | 32 | --- | 18 | 53 |
| 0.51 | 10 | 1.0 | --- | 17 | 18 | --- | 18 | 41 | --- | 19 | 68 |

^A VALUE OF R_{g1} IS NOT CRITICAL.

GAIN MEASURED AT E_o = 2.0 VOLTS RMS OUTPUT.



E_o IS RMS OUTPUT FOR 5% TOTAL HARMONIC DISTORTION.

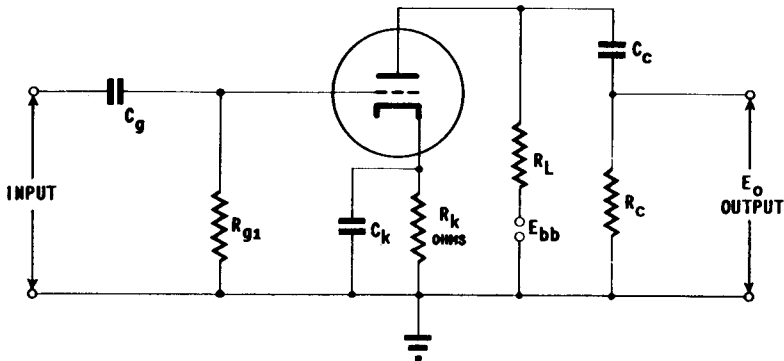

NOTE: COUPLING CAPACITORS C_g AND C_c SHOULD BE SELECTED TO GIVE DESIRED FREQUENCY RESPONSE. R_k SHOULD BE ADEQUATELY BY-PASSED BY CAPACITOR C_k.

→ INDICATES A CHANGE OR ADDITION

PLATE
1945
JAN. 2,
1948

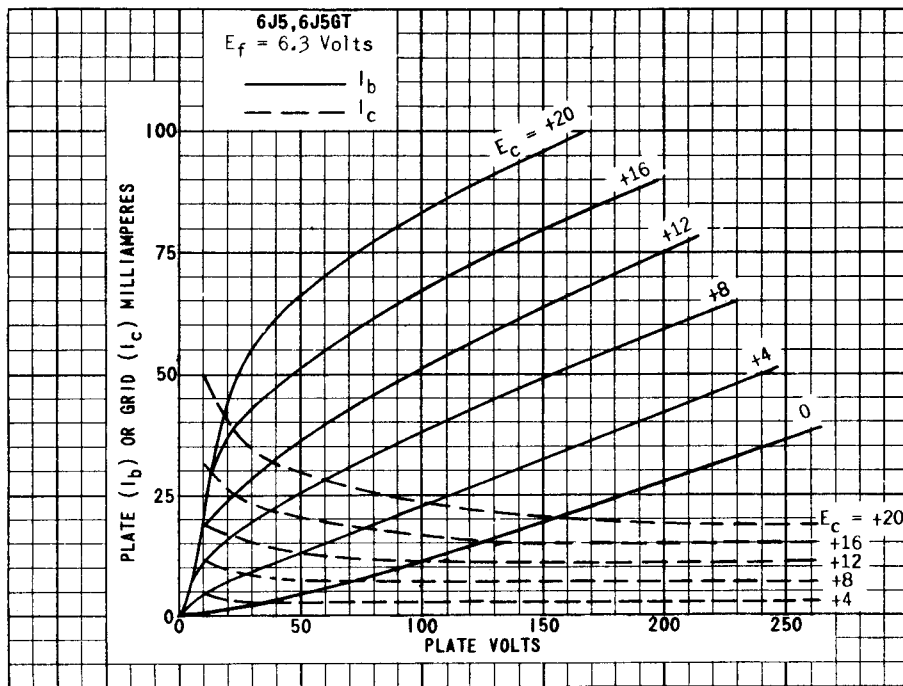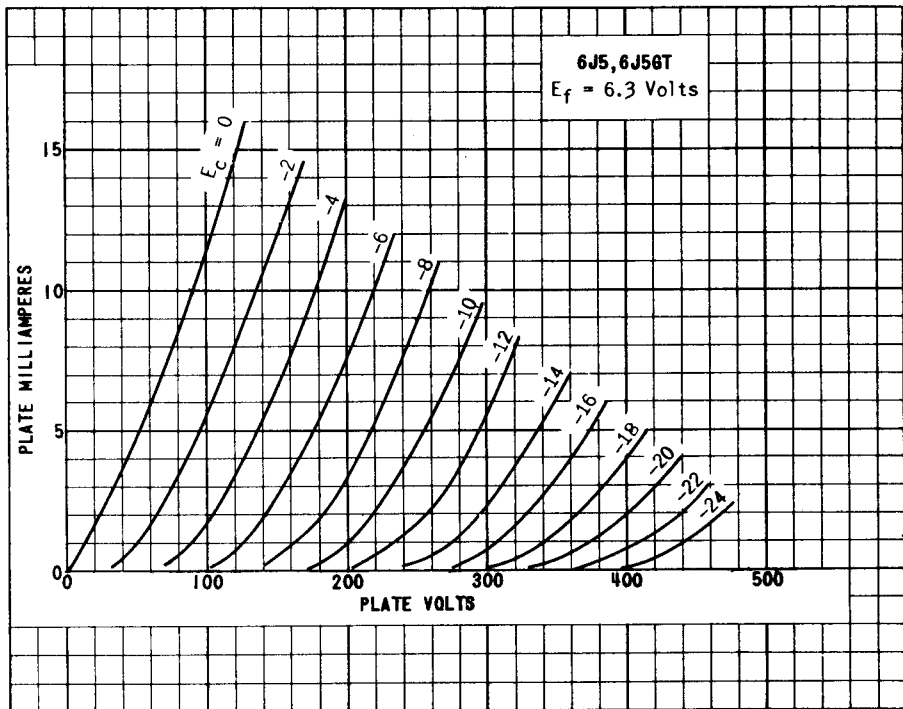

PRINTED IN U. S. A.

PLATE
 1946
 JAN. 2,
 1948

6J5,6J5GT

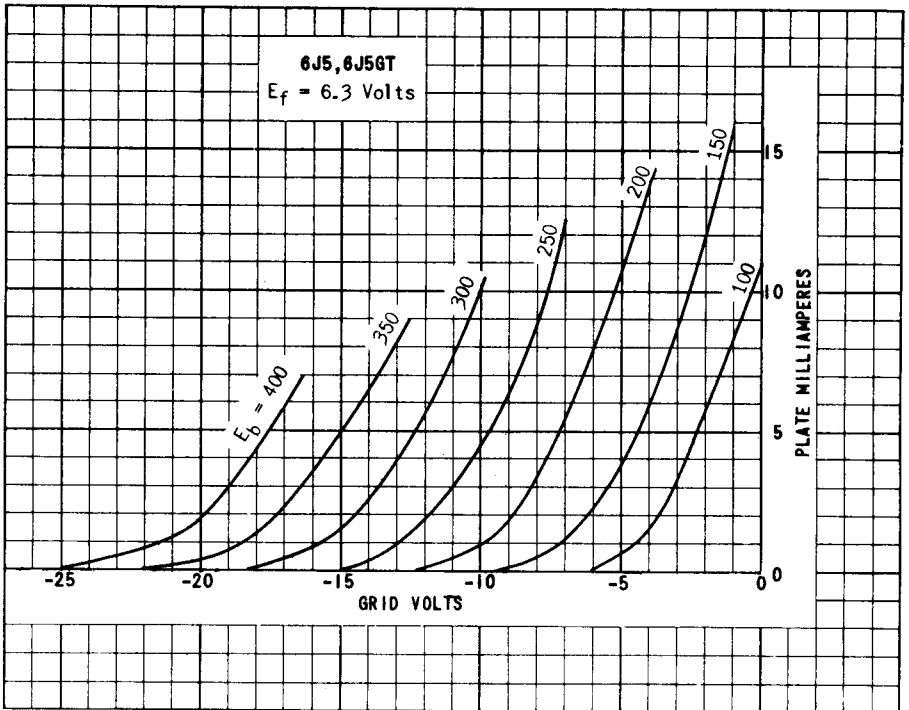
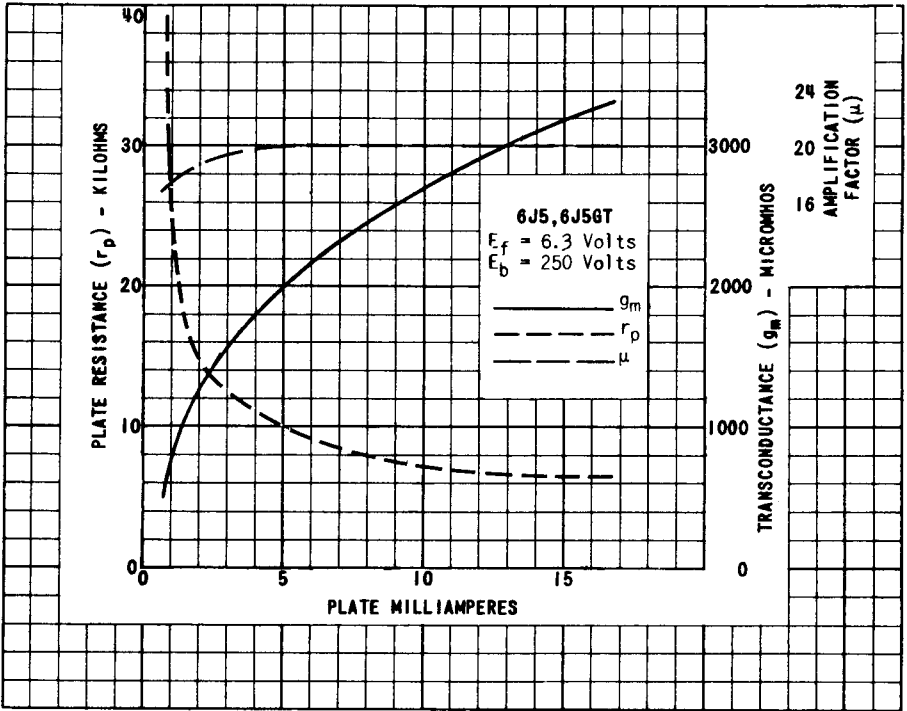


PLATE
 1947
 JAN. 2,
 1948